

Building B, Langling Industry Park, DS Road, Huadu District, Guangzhou

Tel: 86 20 86432439 Fax: 86 20 36880919

Homepage: www. vangaa. com, Email: info@vangaalight. com






·Equipped with a high power imported branded lamp, it's a follow spot of high brightness which far exceeds that of the 3000 Watt metal halide follow spot light. It's an excellent choice for entertainment, stages etc.


Features

- Full copper radiator of large area adopted, good heat dissipating performance, ensuring long lifespan of the LED lamp;
- Efficient optical lenses, together with special cooling system, generate downy light of small stray and without glare, which is comfortable with human eyes;
- LED lamp saves up to 80% of the light energy;
- Hardly any infrared radiation that the workplace will be greatly improved.

Illuminance

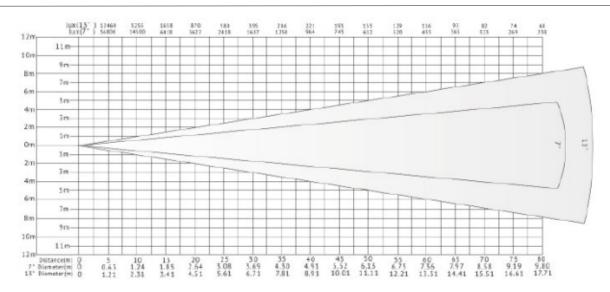





Technical Specification

Light Sources

·LED: 600W LED lamp of high brightness

·Lifespan: 50,000 hours

·Color: seven colors + white, changeable by

color wheel

·Color temperature: 7500-8000K

Optics

·Beam angle: 7-13°

·Color wheel: seven colors+ white

·Color temperature wheel: 3200K+4500K+5600K

·Dimmer: 0-100% linear dimmer

·Strobe: 1-20 times/second

Light Output

·Optimal projection distance: 100-150 m

Control

·Control mode: DMX-512; Manual

·DMX channel: 5CH

·Display of control panel: LCD display + 4 buttons

Power Supply

·Related voltage: AC100-240 V, 50/60 Hz

·Related power: 680W

Construction

·Body dimension: 1028*208*336 mm

·Net weight: 17.5 kg

·Shell color: black

·Shell material: aluminium die casting

Working Environment

·Working temperature: -25-40?

·Cooling: fan+ aluminum radiator

·Protection rating: IP20

Standard Configuration Spare Part List

·Cable: 1 pc of 3-pin DMX cable, 1 pc of power

cable with plug (American, European or other standards)

·User manual: English version user manual

·Tripod: 1 pc

Optional Configuration Spare Parts List

 \cdot Clamps: different styles of clamps optional

(chosen from VanGaa homepage "Accessaries series")

·Safety rope: different sizes of safety ropes optional

(choosen from VanGaa homepage "Accessaries series")

Package

·Carton box package size: 1190*370*400 mm

(1 pc/carton) [c:19-11-19]

·N.W/G.W/V.W: 17.5 kg/20.3 kg/35.3 kg

·Flight case package size: 1240*540*510 mm

(1 pc/case) [without caster] [c:19-11-19]

·N.W/G.W/V.W: 17.5 kg/53.7 kg/68.3 kg

·Flight case package size: 1150*990*630 mm

(2 pcs/case) [with caster] [yg:19-04-05]

 \cdot N.W/G.W/V.W: 35 kg/70 kg/143 kg

Selling Maintain Spare Parts List

·Switching power supply: VG-LFL600-P


·LED lamp board: VG-LFL600-L

·Main board: VG-LFL600-M


·Drive board: VG-LFL600-D



Dimension







Effect

